




Model H571LD-1A Leak detection hydrophone

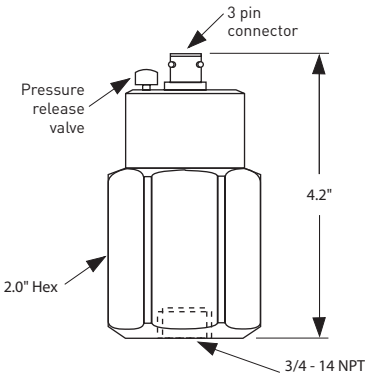

Sensitivity, ± 3 dB.....	-187 dB re 1V/ μ Pa
Amplifier frequency response, ± 3 dB.....	5 Hz to 20 kHz
Powering: voltage source	9 - 15 VDC
current regulating diode	1.5 - 4 mA
Bias voltage	6 VDC
Mounting.....	3/4 - 14 NPT
Case material	316 stainless steel housing
Output connector	3 pin, MIL-C-26482
Mating connector.....	Wilcoxon Research R4 (Amphenol PTO6A-8-3S (SR))

Connector	Function
Pin A	case
Pin B	common
Pin C	power, signal

Wilcoxon Research Inc
20511 Seneca Meadows Parkway
Germantown, MD 20876
USA

Tel: 301 330 8811
Fax: 301 330 8873
Email: wilcoxon@meggitt.com

www.meggitt.com



MEGGITT
smart engineering for
extreme environments

98423 Rev. 4.2 12/07